

CUTLER


genuine terrazzo

receptors


for every type of installation

*rustproof
leakproof
easier to install*


JOS. TANET & SON
Manufacturers' Representative
4408 CALLIOPE ST.
NEW ORLEANS 25, LA.
PHONE 822-3656

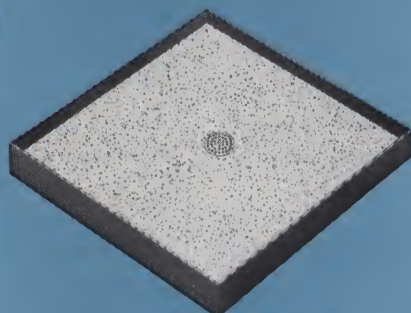


STANDARD RECEPTOR
SQUARE MODEL

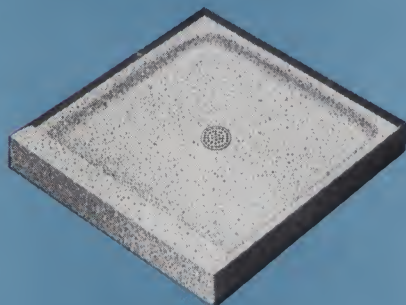


BILTMORE RECEPTOR
SQUARE MODEL




BILTMORE RECEPTOR
RECTANGULAR MODEL

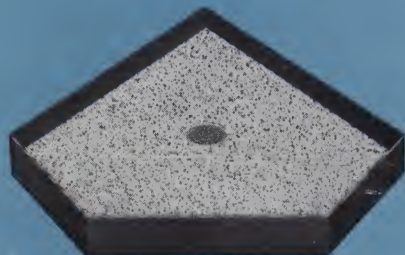


STANDARD RECEPTOR
CORNER MODEL

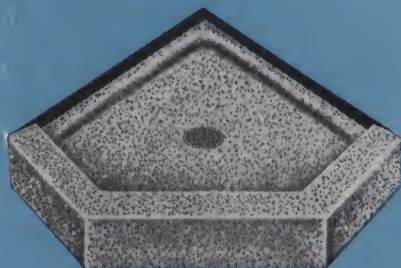


BILTMORE RECEPTOR
CORNER MODEL

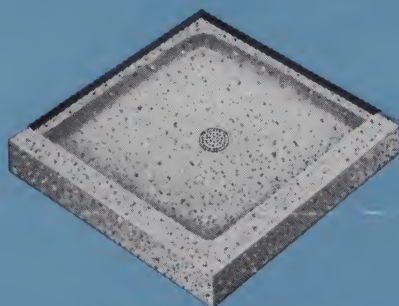

BILTMORE RECEPTOR
DOUBLE THRESHOLD

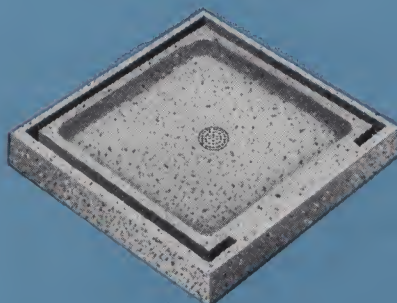

NIAGARA RECEPTOR
FOR SLAB WALLS

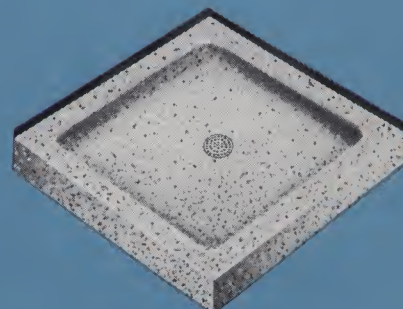

MOP SERVICE
BASIN

CUTLER METAL PRODUCTS CO., CAMDEN, N. J.

CUTLER SHOWER RECEPTORS


of genuine terrazzo—rustproof—leakproof

The receptor is the critical point in any shower installation. Cutler Receptors provide the ideal foundation for any and every type of shower because they're leak-proof, easy to install, and quality-made of genuine terrazzo to last a lifetime. Genuine sparkling marble chips embedded in cement recapture the elegant beauty of the famous marble chip floors of the Italian Renaissance—add style, color, brilliance, durability to the

most modern decor. The smooth, highly polished surface is safe, sanitary, and easy to clean. And Cutler genuine terrazzo receptors, though the finest made, cost no more than ordinary receptors. Two basic types are available: The Biltmore and The Standard with models and colors for every type of installation. Cutler receptors are available through leading plumbing wholesalers. For further information, write.

CUTLER BILTMORE RECEPTOR

with integral terrazzo threshold and flashing flange

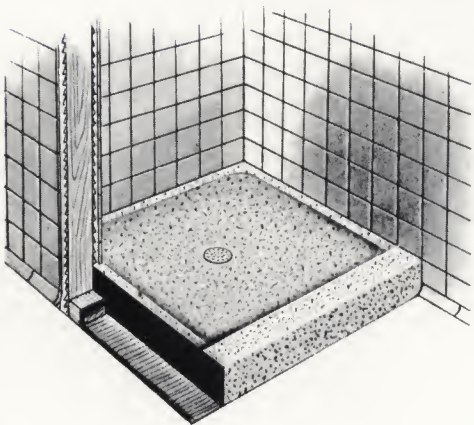

SPECIFICATION—BILTMORE—Shower floor shall be Biltmore type precast receptor, as manufactured by Cutler Metal Products Co. Floor, threshold, and curb shall be cast as a one-piece unit. Flange, which is cast integral, shall be of galvanized-bonderized steel and shall extend not less than 1" above the shoulder. Shoulder shall not be less than 1" high and not less than 1 1/4" wide.


Drain body shall be of brass cast integral and shall provide for a caulk lead connection not less than 1" deep to a 2" pipe. Removable type strainer plate shall be made of stainless steel or chrome plated brass.

TERRAZZO shall be made of genuine marble chips cast in white portland cement to produce a compressive strength of not less than 3,000 psi, seven days after casting. Terrazzo surfaces shall be ground and polished with all air holes and/or pits grouted and excess removed.

Color Note: Stock units are made with black and white marble chips in white cement and in sizes shown. However, any other color combination or size desired can be supplied.

Available throughout the U. S. A. through leading plumbing wholesalers or write for further information.


DIMENSIONS

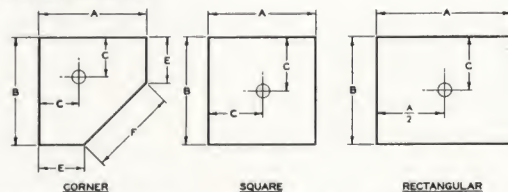

Type	Size	Number	A	B	C	E	F	Ht
Corner	40 x 40	BLC40T	40	40	12	2 1/4	26 3/8	5
Corner	36 x 36	BLC36T	36	36	12	1 7/8	26 3/8	5
Square	40 x 40	BLS40T	40	40	20	—	—	5
Square	36 x 36	BLS36T	36	36	18	—	—	5
Square	32 x 32	BLS32T	32	32	16	—	—	5
Rectangular	48 x 32	BLR48T	48	32	16	—	—	5
Double Threshold	32 x 32	BLSD32T	32	32	16	—	—	5
Double Threshold	36 x 36	BLSD36T	36	36	18	—	—	5
Double Threshold	40 x 40	BLSD40T	40	40	20	—	—	5

Note: Color and larger or special sizes to specifications available upon request at additional cost.


FASTER—EASIER TO INSTALL

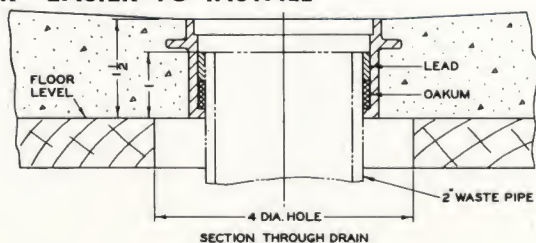

1. cut small hole for drain connection
2. place receptor
3. caulk drain connection with oakum and lead
4. install finished wall as required

note: Mop Service Basin has 3" connection

CUTLER STANDARD RECEPTORS

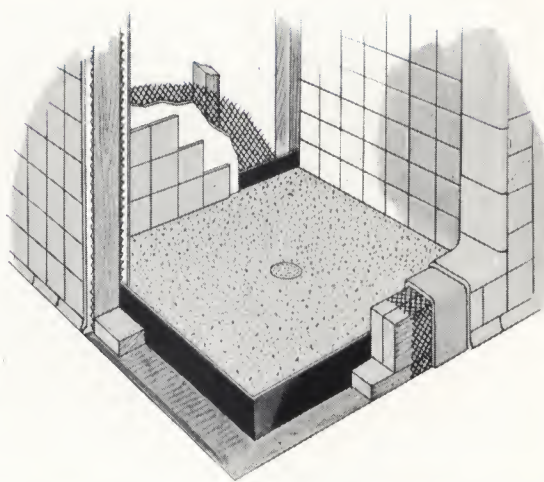



SPECIFICATION—STANDARD—Shower floor shall be Standard type precast receptor as manufactured by Cutler Metal Products Co. Flange which is cast integral shall be of galvanized-bonderized steel and shall extend not less than 1" above the floor. Drain body shall be of cast brass, cast integral, and shall provide for a caulked lead connection not less than 1" deep to a 2" pipe. Removable type strainer plate shall be made of stainless steel or chrome plated brass.

TERRAZZO shall be made of genuine marble chips cast in white portland cement to produce a compressive strength of not less than 3,000 psi, seven days after casting. Terrazzo surface shall be ground and polished with all air holes and/or pits grouted and excess removed.

Color Note: Stock units are made with black and white marble chips in white cement and in sizes shown. However, any other color combination or size desired can be supplied.

Available throughout the U. S. A. through leading plumbing wholesalers or write for further information.

DIMENSIONS




Type	Size	Number	A	B	C	E	F	Ht.
Corner	36 x 36	RR36T	36	36	14 3/4	14 3/4	30 1/16	4"
Square	36 x 36	RB36T	36	36	18	—	—	4"
Square	32 x 32	RC32T	32	32	16	—	—	4"
Square	30 x 30	RC30T	30	30	15	—	—	4"

Note: Color and larger or special sizes to specifications available upon request at additional cost.


The Cutler Standard genuine terrazzo receptor is a one piece monolithic cast construction with drain and metal tiling flange cast integral. This galvanized-bonderized steel metal rim interlocks into the genuine terrazzo slab making a permanent leakproof unit and providing a waterproof overlap to which any form of plaster, ceramic, plastic or metal tile, structural glass or marble can easily be applied. The Cutler Standard genuine terrazzo receptor is intended for installations where a threshold that is built on the job is preferred. Leakproof one-piece cast construction with reinforcing steel rods running through base in both directions requires no lead pan or mortar bed and is unaffected by average building settlement since it is not affixed to building framing. Perfect floor pitch provides permanent perfect drainage. An ideal receptor for use where economy is a factor. Black and white terrazzo standard, colors optional.

CUTLER NIAGARA RECEPTOR

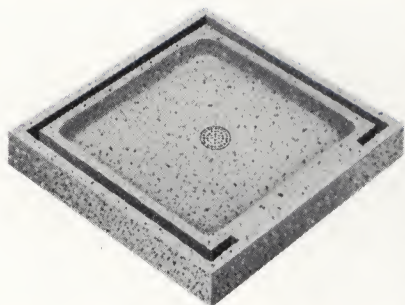



Made to order on a custom basis the Niagara receptor is especially designed for structural glass, marble, or slate slab wall construction with single or double units. specification

Shower floor shall be Niagara type precast terrazzo receptor with integral rabbit as manufactured by Cutler Metal Products Co. Rabbit shall be (specify dimension) to suit (specify material). Drain body shall be brass, cast integral and shall provide for a caulked lead connection to a 2" pipe. Removable strainer plate shall be chrome plated brass.

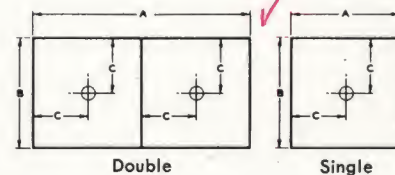

Number	A	B	C	Ht.
NSF3672T	72	36	18	6
NSF36T	36	36	18	6

CUTLER MOP SERVICE BASIN

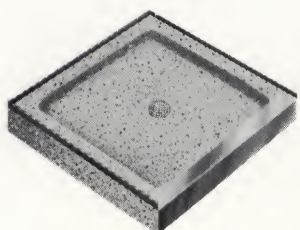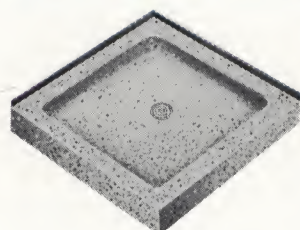


Cutler mop service basin is designed for convenient use with gravity draining mop trucks and easy storage of wet mops, with high sides to accommodate surges in flow. The units have heavy rugged shoulders and one-piece construction for long water-tight life. Units can be supplied with bonderized-galvanized flange on one, two or three sides as required by walls, and with an optional stainless steel threshold guard on the remaining side or sides.

JOS. TANET & SON
Manufacturers' Representatives
4408 CALLIOPE ST.
NEW ORLEANS 25, LA.
PHONE 822-3656

SPECIFICATION

Mop Service Basin shall be precast terrazzo as manufactured by Cutler Metal Products Co. and shall have shoulders of at least 4" height and 3" width with galvanized-bonderized flange cast integral on sides as shown in the drawings for placement against walls and extending 1" above unit, and (optional). Stainless steel protective cap shall be cast-integral on sides not against wall(s). Drain body shall be brass, cast-integral and shall provide for a caulked lead connection to a 3" pipe. Removable strainer plate shall be of chrome plated brass.



Number	A	B	C
MSB24T	24	24	12
MSB32T	32	32	16
MSB36T	36	36	18
MSB3624T	36	24	12

CUTLER METAL PRODUCTS CO.

CUTLER SHOWER CABINETS

Over 40 years of metal-engineering know-how goes into the planning, the designing and the construction of Cutler Shower Cabinets. The combination of *quality materials, quality workmanship, quality styling* and *reliable rustproof performance* provides a shower that gives maximum troublefree service wherever it is installed—in the home, the summer cottage, camps, hotels, motels, institutions and industrial plants. When you select a Cutler Shower Cabinet—and there's a model for every price range and every type of installation—you can be sure you are getting the very finest made. White standard, decorator colors and glass doors optional. Cutler Shower Cabinets are available through leading plumbing wholesalers.

SPECIFICATIONS

GENERAL: Furnish and install as shown on plans, shower cabinets (Size & Model) as manufactured by Cutler Metal Products Co.


WALLS: All walls to be of heavy gauge galvanized-bonderized steel finished in double coat alkali-resistant white baked enamel. Waterproof lock nut and washers at valve openings, all joints between panels flanged and interlocked for easy waterproof assembly.

RECEPTOR: For Cutler Shower Models see specifications for Cutler Genuine Terrazzo Standard or Biltmore receptor on preceding page. Include Type, Size, Number. *Note:* Champion Model furnished with white precast *Craftstone* receptor completely encased in galvanized-bonderized steel frame, with reinforcing members, skid resistant concentric rings, cast-in brass drain with chrome brass strainer.

STANDARD TRIM: Chrome plated brass mixing valves, adjustable shower head, self-draining soap dish, vinyl shower curtain, chrome plated curtain rings.

OPTIONAL EQUIPMENT AVAILABLE: Glass doors, desired wall colors, special mixing valves and heads. Write company for Shower Brochure and complete Architectural Specification Sheet.

DIMENSIONS

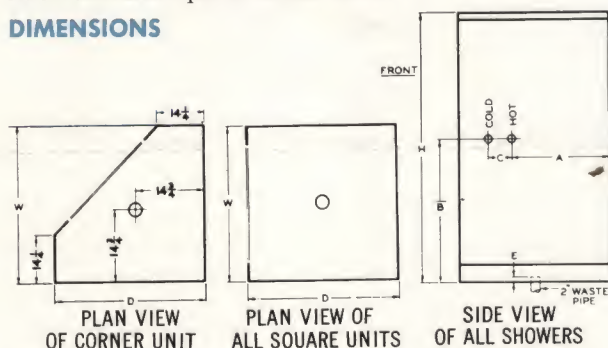

NAME	W	D	H	A	B	C	E
RIVIERA	36	36	78	24 3/8	40	5	1
BERMUDA	36	36	78	26 3/8	40	5	1
NEWPORT	32	32	78	13 1/2	43 1/2	5	1
CAPRI	32	32	78	22 3/4	40	4	1
CAPRI	30	30	78	20 3/8	40	4	1
CHAMPION	32	32	78	23	38 3/8	3 3/8	1
CHAMPION	32	32	78	23	38 3/8	3 3/8	1 1/4
CHAMPION	30	30	78	21 1/4	38 3/8	3 3/8	1
CHAMPION	30	30	78	21 1/4	38 3/8	3 3/8	1 1/4





RIVIERA-R36T

corner, 36" x 36"
terrazzo receptor

BERMUDA-B36T

square, 36" x 36"
terrazzo receptor

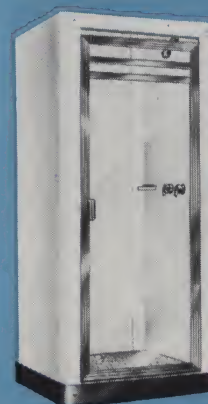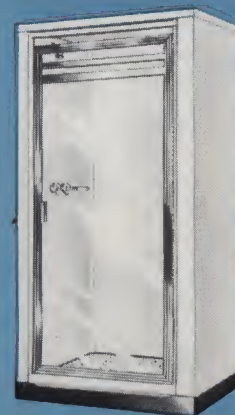


NEWPORT-N32T

square, 32" x 32"
terrazzo receptor

CAPRI

square, 32" x 32"—C32T
square, 30" x 30"—C30T
terrazzo receptor

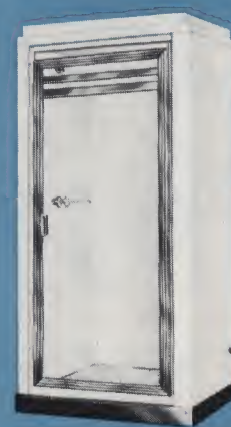

CHAMPION

terrazzo tone receptor
square, 32" x 32"—CH32P
square, 30" x 30"—CH30P
craftstone receptor
square, 32" x 32"—CH32S
square, 30" x 30"—CH30S

CUTLER METAL PRODUCTS CO., CAMDEN, N. J.

CUTLER SHOWER CABINETS

Over 40 years of metal-engineering know-how goes into the planning, the designing and the construction of Cutler Shower Cabinets. The combination of *quality materials, quality workmanship, quality styling and reliable rustproof performance* provides a shower that gives maximum troublefree service wherever it is installed—in the home, the summer



RIVIERA-R36T
corner, 36" x 36"
terrazzo receptor

Digitized by:



ASSOCIATION FOR PRESERVATION TECHNOLOGY

www.apti.org

For the

BUILDING TECHNOLOGY HERITAGE LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:



SOUTHEASTERN ARCHITECTURAL ARCHIVE
SPECIAL COLLECTIONS
HOWARD-TILTON MEMORIAL LIBRARY

<http://seaa.tulane.edu>

NAME	PLAN VIEW OF CORNER UNIT		PLAN VIEW OF ALL SQUARE UNITS			SIDE VIEW OF ALL SHOWERS		
	W	D	H	A	B	C	E	
RIVIERA	36	36	78	24 $\frac{3}{8}$	40	5	1	
BERMUDA	36	36	78	26 $\frac{3}{8}$	40	5	1	
NEWPORT	32	32	78	13 $\frac{1}{2}$	43 $\frac{1}{2}$	5	1	
CAPRI	32	32	78	22 $\frac{3}{4}$	40	4	1	
CAPRI	30	30	78	20 $\frac{7}{8}$	40	4	1	
CHAMPION	32	32	78	23	38 $\frac{3}{8}$	3 $\frac{3}{8}$	1	
CHAMPION	32	32	78	23	38 $\frac{3}{8}$	3 $\frac{3}{8}$	$\frac{1}{4}$	
CHAMPION	30	30	78	21 $\frac{1}{4}$	38 $\frac{3}{8}$	3 $\frac{3}{8}$	1	
CHAMPION	30	30	78	21 $\frac{1}{4}$	38 $\frac{3}{8}$	3 $\frac{3}{8}$	$\frac{1}{4}$	



CHAMPION

terrazzo tone receptor
square, 32" x 32"—CH32P
square, 30" x 30"—CH30P
craftstone receptor
square, 32" x 32"—CH32S
square, 30" x 30"—CH30S

CUTLER METAL PRODUCTS CO., CAMDEN, N. J.